
U74LVC1G08

CMOS IC

2-INPUT AND GATE

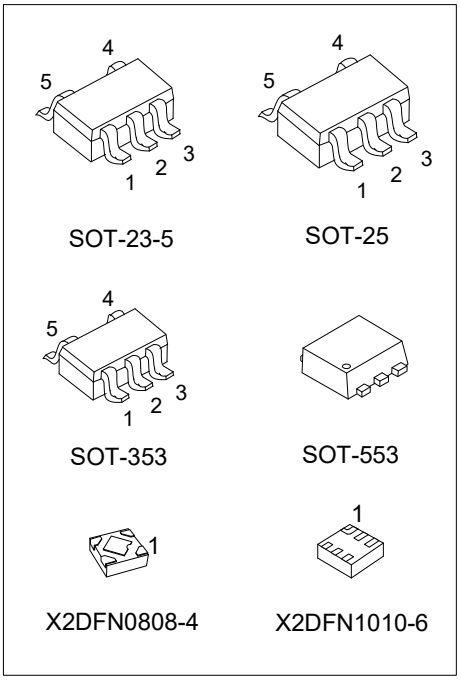

■ DESCRIPTION

The **U74LVC1G08** is a 2-input AND gate which provides the Function Y=A×B.

This device has power-down protective circuit to prevent device form destruction when it is powered down.

■ FEATURES

* Operation Voltage Range: 1.65V ~ 5.5V
* Low Power Current: I_{CC}=10μA (Max.)
* ±24mA Output Drive (V_{CC}=3.0V)
* Power Down Protection
* Green & Pb Free

■ ORDERING INFORMATION

Ordering Number	Package	Packing
U74LVC1G08G-AE5-R	SOT-23-5	Tape Reel
U74LVC1G08G-AF5-R	SOT-25	Tape Reel
U74LVC1G08G-AL5-R	SOT-353	Tape Reel
U74LVC1G08G-AN5-R	SOT-553	Tape Reel
U74LVC1G08G-K04-0808X2-R	X2DFN0808-4	Tape Reel
U74LVC1G08G-K06-1010X2-R	X2DFN1010-6	Tape Reel

U74LVC1G08G-AE5-R
(1)Packing Type
(2)Package Type
(3)Green Package


(1) R: Tape Reel
(2) AE5: SOT-23-5, AF5: SOT-25, AL5: SOT-353
AN5: SOT-553, K04-0808X2: X2DFN0808-4
K06-1010X2: X2DFN1010-6
(3) G: Halogen Free and Lead Free

■ MARKING


SOT-23-5 / SOT-25 / SOT-353 / SOT-553	X2DFN0808-4 / X2DFN1010-6
5 4 3Y8G 1 2 3	Y8 ●

Copyright © 2026 Unisonic Technologies Co., Ltd


■ PIN CONFIGURATION



SOT-23-5 / SOT-25
SOT-353 / SOT-553



X2DFN0808-4
(TOP VIEW)




X2DFN1010-6
(TOP VIEW)


■ FUNCTION TABLE

INPUT		OUTPUT
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

■ LOGIC DIAGRAM (positive logic)



Logic symbol



IEC logic symbol

■ ABSOLUTE MAXIMUM RATING (Unless otherwise specified) (Note 1, 3)

PARAMETER	SYMBOL	~~TEST~~ CONDITIONS	RATINGS	UNIT
Supply Voltage	V_{CC}		-0.5 ~ 6.5	V
Input Voltage (Note 2)	V_{IN}		-0.5 ~ 6.5	V
Output Voltage (Note 2)	V_{OUT}	Output in the high or low state	-0.5 ~ V_{CC}+0.5	V
		Output in the power-off state	-0.5 ~ 6.5	V
Continuous V_{CC} or GND Current	I_{CC}		±100	mA
Continuous Output Current	I_{OUT}		±50	mA
Input Clamp Current	I_{IK}	V_{IN}<0	-50	mA
Output Clamp Current	I_{OK}	V_{OUT}<0	-50	mA
Storage Temperature Range	T_{STG}		-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
3. It's guarantee by design, this parameter is not production tested.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	Operating	1.65		5.5	V
		Data retention only	1.5			V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}	High or low state	0		V_{CC}	V
Input Transition Rise or Fall Rate	Δt/Δv	V_{CC}=1.8V±0.15V V_{CC}=2.5V±0.2V			20	ns/V
		V_{CC}=3.3V±0.3V			10	ns/V
		V_{CC}=5V±0.5V			5	ns/V
Operating Temperature	T_A		-40		+125	°C

Note: It's guarantee by design, this parameter is not production tested.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-23-5	θ_{JA}	280	°C/W
	SOT-25		230	°C/W
	SOT-353		350	°C/W
	SOT-553		370	°C/W
	X2DFN0808-4		350	°C/W
	X2DFN1010-6		420	°C/W

■ STATIC CHARACTERISTICS (unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	T_A=25°C			T_A=-40°C~+125°C			UNIT
			MIN	TYP	MAX	MIN	TYP	MAX	
High-Level Input Voltage	V_{IH}	V_{CC} =1.65V~1.95V	0.65×V_{CC}			0.65×V_{CC}			V
		V_{CC} =2.3V~2.7V	1.7			1.7			V
		V_{CC} =3.0V~3.6V	2			2			V
		V_{CC} =4.5V~5.5V	0.7×V_{CC}			0.7×V_{CC}			V
Low-Level Input Voltage	V_{IL}	V_{CC} =1.65V~1.95V			0.35×V_{CC}			0.35×V_{CC}	V
		V_{CC} =2.3V~2.7V			0.7			0.7	V
		V_{CC} =3.0V~3.6V			0.8			0.8	V
		V_{CC} =4.5V~5.5V			0.3×V_{CC}			0.3×V_{CC}	V
High-Level Output Voltage	V_{OH}	V_{CC} =1.65V ~ 5.5V, I_{OH}=-100μA	V_{CC}-0.1			V_{CC}-0.1			V
		V_{CC} =1.65V, I_{OH}=-4mA	1.2			0.95			V
		V_{CC} =2.3V, I_{OH}=-8mA	1.9			1.7			V
		V_{CC} =3.0V, I_{OH}=-16mA	2.4			2.1			V
		V_{CC} =3.0V, I_{OH}=-24mA	2.3			2			V
		V_{CC} =4.5V, I_{OH}=-32mA	3.8			3.4			V
Low-Level Output Voltage	V_{OL}	V_{CC} =1.65V ~ 5.5V, I_{OL}=100μA			0.1			0.1	V
		V_{CC} =1.65V, I_{OL}=4mA			0.45			0.7	V
		V_{CC} =2.3V, I_{OL}=8mA			0.3			0.45	V
		V_{CC} =3.0V, I_{OL}=16mA			0.4			0.6	V
		V_{CC} =3.0V, I_{OL}=24mA			0.55			0.8	V
		V_{CC} =4.5V, I_{OL}=32mA			0.55			0.8	V
Input Leakage Current	$I_{I(LEAK)}$	V_{CC} =0V ~ 5.5V, V_{IN}=5.5V or GND			±5			±5	μA
Power OFF Leakage Current	I_{OFF}	V_{CC} =0V, V_{IN} or V_{OUT}=5.5V			±10			±10	μA
Quiescent Supply Current	I_{CC}	V_{CC} =1.65V~5.5V, V_{IN}=5.5V or GND I_{OUT}=0			10			10	μA
Additional Quiescent Supply Current	ΔI_{CC}	V_{CC}=3V~5.5V,One input at V_{CC}-0.6V, other inputs at V_{CC} or GND			500			500	μA

Note: It's guarantee by design, this parameter is not production tested.

■ DYNAMIC CHARACTERISTICS (unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS		T_A=25°C			T_A=-40°C~+125°C			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
Propagation Delay From Input (A or B) to Output (Y)	t_{PLH}/t_{PHL}	C_L=15pF	V_{CC}=1.8V±0.15V	1.5		10			12.5	ns
			V_{CC}=2.5V±0.2V	0.7		8			10.5	ns
			V_{CC}=3.3V±0.3V	0.8		6			8.5	ns
			V_{CC}=5V±0.5V	0.8		4.2			6	ns
		C_L=30 or 50pF	V_{CC}=1.8V±0.15V	2.4		11			13.5	ns
			V_{CC}=2.5V±0.2V	1.1		9			11.5	ns
			V_{CC}=3.3V±0.3V	1		8			10.5	ns
			V_{CC}=5V±0.5V	1		7			9.5	ns

Note: It's guarantee by design, this parameter is not production tested.

■ OPERATING CHARACTERISTICS (f=10MHz, T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Capacitance	C_{IN}	V_{CC} =3.3V, V_{IN}=V_{CC} or GND		4		pF
Power Dissipation Capacitance	C_{PD}	V_{CC}=1.8V		21		pF
		V_{CC}=2.5V		24		pF
		V_{CC}=3.3V		26		pF
		V_{CC}=5V		31		pF


■ TEST CIRCUIT AND WAVEFORMS

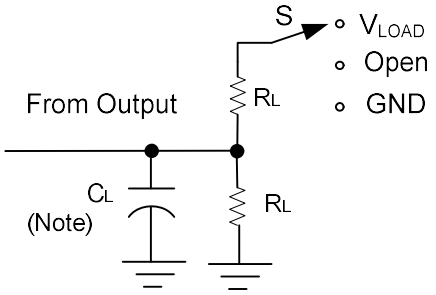

TEST	S
t_{PLH}/t_{PHL}	Open
t_{PHZ}/t_{PZH}	GND
t_{PLZ}/t_{PZL}	V_{LOAD}

Note: C_L includes probe and jig capacitance.

V_{CC}	V_{IN}	t_R,t_F	V_M	V_{LOAD}	C_L	R_L	$V_\triangle$
1.8V±0.15V	V_{CC}	≤2ns	$V_{CC}/2$	2×V_{CC}	15pF	1MΩ	0.15V
2.5V±0.2V	V_{CC}	≤2ns	$V_{CC}/2$	2×V_{CC}	15pF	1MΩ	0.15V
3.3V±0.3V	3 V	≤2.5ns	1.5V	6V	15pF	1MΩ	0.3V
5V±0.5V	V_{CC}	≤2.5ns	$V_{CC}/2$	2×V_{CC}	15pF	1MΩ	0.3V
1.8V±0.15V	V_{CC}	≤2ns	$V_{CC}/2$	2V_{CC}	30pF	1KΩ	0.15V
2.5V±0.2V	V_{CC}	≤2ns	$V_{CC}/2$	2×V_{CC}	30pF	500Ω	0.15V
3.3V±0.3V	3 V	≤2.5ns	1.5V	6V	50pF	500Ω	0.3V
5V±0.5V	V_{CC}	≤2.5ns	$V_{CC}/2$	2×V_{CC}	50pF	500Ω	0.3V

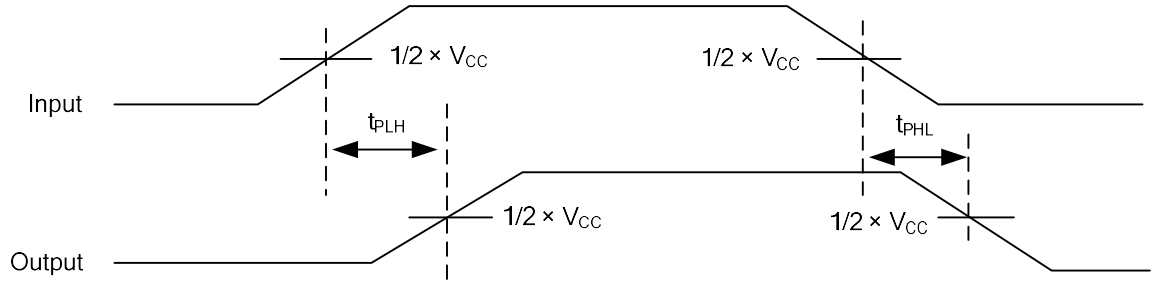

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.